



输出功率: 约0.2~5.0W
贵金属电刷马达/碳刷马达

典型应用: 视听设备
精密仪器
家用电器


OUTPUT: APPROX 0.2~5.0W
Precious Metal-brush Motors/Carbon-brush Motors

Typical Applications: Audiovisual Equipment
Precision Instrument
Household Appliances

1. OUTLINE DRAWING:

UNIT:MM

DIRECTION OF ROTATION

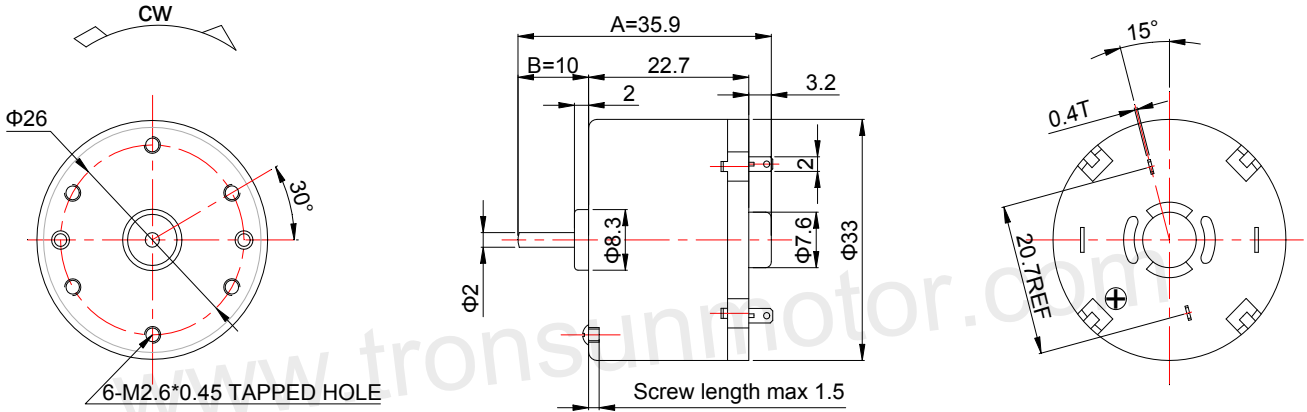


Customizable Parameters:

1. Length A and B
2. Electric Performance
3. Direction of Rotation

WEIGHT: 55g(Approx)

View:



2. MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE g.cm	TORQUE mN.m	OUTPUT W	TORQUE g.cm	TORQUE mN.m	CURRENT A
RF-520TB-17410	3.0~6.0	5.0	2400	0.02	2044	0.12	17.8	1.75	0.37	130	12.76	0.66
RF-520TB-09900	6.0~11.0	10.0	2100	0.008	1734	0.04	16.7	1.64	0.30	96	9.42	0.18

